

# ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

**LV** Chip Type, High Voltage.  
Long Life.  
series



Expanded

- Chip Type, high voltage and long life.
- Load life of 10000 hours at +105°C
- Applicable to automatic mounting machine using carrier tape.
- Adapted to the RoHS directive (2011/65/EU).




## Specifications

| Item                          | Performance Characteristics   |   |     |     |     |     |     |
|-------------------------------|---|---|-----|-----|-----|-----|-----|
| Category Temperature Range    | -40 to +105°C   |   |     |     |     |     |     |
| Rated Voltage Range           | 160 to 500V   |   |     |     |     |     |     |
| Rated Capacitance Range       | 1.8 to 33μF   |   |     |     |     |     |     |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C   |   |     |     |     |     |     |
| Leakage Current               | Rated voltage (V)   | 160 to 450  |     |     |     |     |     |
|                               | -   | 0.04CV+100(μA)max.(1 minute's)                    |     |     |     |     |     |
| Tangent of loss angle (tan δ) | Rated voltage (V)   | 500   |     |     |     |     |     |
|                               | -   | 0.04CV+200(μA)max.(1 minute's)                    |     |     |     |     |     |
| Stability at Low Temperature  | Measurement frequency : 120Hz at 20°C   |   |     |     |     |     |     |
|                               | Rated voltage (V)   | 160   | 200 | 250 | 400 | 450 | 500 |
| Endurance                     | Impedance ratio   | Measurement frequency: 120Hz                      |     |     |     |     |     |
|                               | ZT / Z20 (MAX.)   | Z-40°C / Z+20°C                                   | 6   | 6   | 10  | 10  | 15  |
| Shelf Life                    | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 10000 hours at 105°C.   |   |     |     |     |     |     |
|                               | Capacitance change  | Within ±30% of the initial capacitance value      |     |     |     |     |     |
| Resistance to soldering heat  | tan δ   | 300% or less than the initial specified value     |     |     |     |     |     |
|                               | Leakage current   | Less than or equal to the initial specified value |     |     |     |     |     |
| Marking                       | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |   |     |     |     |     |     |
|                               | Capacitance change  | Within ±10% of the initial capacitance value      |     |     |     |     |     |
| Marking                       | tan δ   | Less than or equal to the initial specified value |     |     |     |     |     |
|                               | Leakage current   | Less than or equal to the initial specified value |     |     |     |     |     |

## Chip Type

(φ8 × 10L, φ10)

Voltage(2G : 400V)

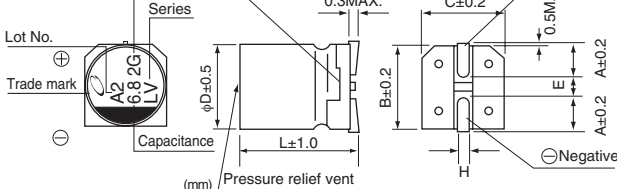


| φD×L | 8 × 10     | 10 × 10    | 10 × 13.5  |
|------|------------|------------|------------|
| A    | 2.9        | 3.2        | 3.2        |
| B    | 8.3        | 10.3       | 10.3       |
| C    | 8.3        | 10.3       | 10.3       |
| E    | 3.1        | 4.5        | 4.5        |
| L    | 10         | 10         | 13.5       |
| H    | 0.8 to 1.1 | 0.8 to 1.1 | 0.8 to 1.1 |

Voltage

| V    | 160 | 200 | 250 | 400 | 450 | 500 |
|------|-----|-----|-----|-----|-----|-----|
| Code | 2C  | 2D  | 2E  | 2G  | 2W  | 2H  |

Type numbering system (Example : 400V 6.8μF)

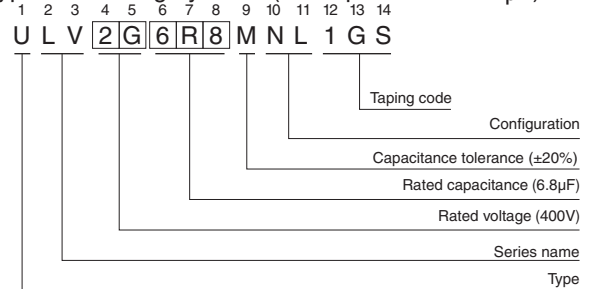

## Dimensions

| Cap.(μF) | V   | 160       |    | 200       |    | 250       |    | 400       |                          | 450          |  | 500       |    |
|----------|-----|-----------|----|-----------|----|-----------|----|-----------|--------------------------|--------------|--|-----------|----|
|          |     | Code      | 2C | 2D        | 2E | 2G        | 2W | 2H        | Case size<br>φD × L (mm) | Rated ripple |  |           |    |
| 1.8      | 1R8 |           |    |           |    |           |    |           |                          |              |  | 8 × 10    | 25 |
| 3.3      | 3R3 |           |    |           |    |           |    |           |                          |              |  | 10 × 10   | 40 |
| 3.9      | 3R9 |           |    |           |    |           |    | 8 × 10    | 35                       |              |  |           |    |
| 4.7      | 4R7 |           |    |           |    |           |    |           |                          |              |  | 10 × 13.5 | 45 |
| 5.6      | 5R6 |           |    |           |    |           |    |           |                          |              |  |           |    |
| 6.8      | 6R8 |           |    |           |    |           |    | 10 × 10   | 50                       |              |  | 10 × 10   | 40 |
| 7.5      | 7R5 |           |    |           |    |           |    |           |                          |              |  | 10 × 13.5 | 45 |
| 8.2      | 8R2 |           |    |           |    | 8 × 10    | 35 |           |                          |              |  |           |    |
| 10       | 100 |           |    |           |    |           |    | 10 × 13.5 | 55                       |              |  |           |    |
| 12       | 120 |           |    |           |    |           |    |           |                          |              |  |           |    |
| 15       | 150 | 8 × 10    | 50 | 8 × 10    | 50 |           |    |           |                          |              |  |           |    |
| 18       | 180 |           |    | 10 × 10   | 65 | 10 × 13.5 | 55 |           |                          |              |  |           |    |
| 22       | 220 | 10 × 10   | 65 |           |    |           |    |           |                          |              |  |           |    |
| 27       | 270 |           |    | 10 × 13.5 | 70 |           |    |           |                          |              |  |           |    |
| 33       | 330 | 10 × 13.5 | 70 |           |    |           |    |           |                          |              |  |           |    |

Rated ripple current (mA rms) at 105°C 120Hz

## Frequency coefficient of rated ripple current

| Frequency   | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
|-------------|-------|--------|--------|-------|----------------|
| Coefficient | 0.80  | 1.00   | 1.25   | 1.40  | 1.60           |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

CAT.8100D